



Prod.no	Date Publish	Replaces Sheet
7720	2015-11-22	2013-01-01

ATF Dexron III

DESCRIPTION


ATF Dexron III is a transmission fluid for automatic transmissions and torque converters in vehicles and machines.

CHARACTERISTICS

ATF Dexron III has extremely good low temperature properties, which is necessary, for example, for electronically controlled automatic transmissions. It also has very good temperature properties. The result of these is good oxidation stability as well as very good lubrication, which extend the lifetime of transmissions.

RECOMMENDATIONS

ATF Dexron III is recommended for all automatic transmissions where ATF type A, Dexron II D, Dexron II E, Ford Mercon, Allison C-4 or Caterpillar TO-2 oils are prescribed. It is also good for torque converters, boat engine sprockets, power steering, suspension units, as well as hydraulic systems where an ATF oil is recommended..

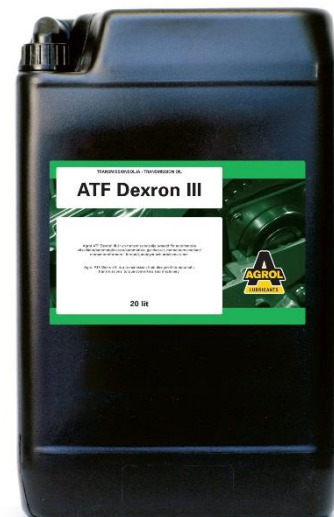

SPECIFICATIONS		
Analyses	Units	Results
Density at 15 °C	kg/m ³	862
Flash Point	°C	176
Pour Point	°C	-48
Viscosity at		
40 °C	mm ² /s	36
100 °C	mm ² /s	7.7
-40 °C	mPa·s	18
Viscosity Index		184

RECOMMENDED FOR	
ATF	Dexron III F, G
ATF	Dexron IIE
Ford	Mercon
Allison	C-4
Voit Diva	G 607
MB	236.1, 236.5, 236.10, 236.11, 236.12
Caterpillar	TO-2
Volvo Transmission Oil 97341:009	
ZF TE-ML	02F, 03D, 04D, 11B, 14A, 17C