



Prod. No.	Date Publish.	Replaces Sheet
7827	2018-11-01	2015-11-23

ATF Syntet 102

DESCRIPTION


ATF Syntet 102 is a synthetic transmission fluid for automatic transmissions and torque converters in vehicles and machinery.

CHARACTERISTICS

ATF Syntet 102 is a superb combination of synthetic base fluids and additives, which counteract sludge and deposits on surfaces. The product can withstand high loads without shearing. ATF Syntet 102 has a high viscosity index as well as oxidation stability. Therefore, it has perfect functionality both at high and low temperatures with retained long change intervals.

RECOMMENDATIONS

ATF Syntet 102 is recommended for all automatic transmissions where ATF lubricants according to the specifications below are recommended. The product is suitable in torque converters, power assisted steering, shock absorbers and hydraulic systems where an ATF product is recommended..

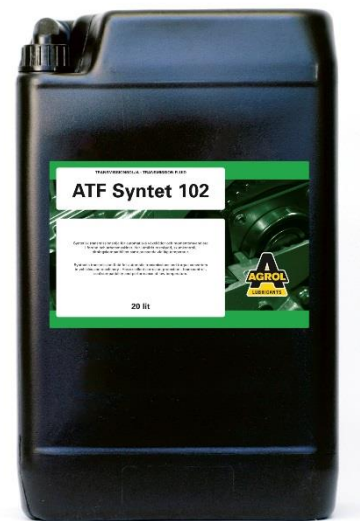

TECHNICAL DATA		
Analyses	Units	Results
Density at 15 °C	kg/m ³	850
Flash Point	°C	211
Pour Point	°C	-51
Viscosity at		
40 °C	mm ² /s	31,8
100 °C	mm ² /s	6,3
Viscosity Index		153

RECOMMENDED FOR

Volvo 97342 (AT 102)
Allison TES-389
Voith H55.6335.xx
Aisin Warner JWS 3309 & 3324
JASO M315 Type 1-A
Toyota Type T-IV